


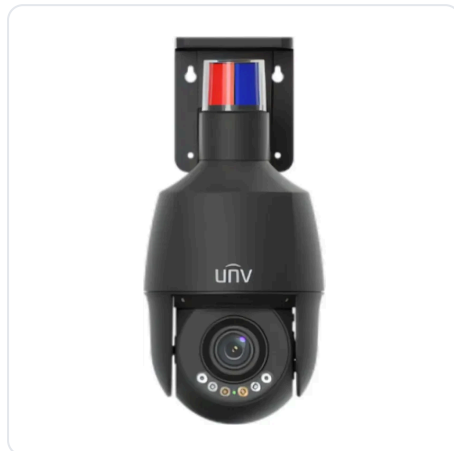

Video Surveillance / IP Cameras / PTZ Cameras

IP Camera - 5MP, Dome, PTZ, 5x, SD, Mic, IR50, Tri-Guard, Uniview

Brand Uniview
Model IPC6325LFW-AX5C-VG-BLACK
Warranty 12 months

Price as of 23.10.2026

801.90

VAT included


Current price and stock: online
<https://alldigital.ge/en/ip-kamera-5mp-dome-ptz-5x-sd-mic-ir50-tri-guard-uniview>

Key specs

Megapixels

5 MP

Optical Zoom

5 ×

IP / IK Rating

IP66

Form Factor

PTZ

IR Range

50 m (164 ft)

Focal Length

2.7–13.5 mm

WDR

120 dB

Camera

Image Sensor	1/2.7" CMOS
Max Resolution	2880 × 1620
Megapixels	5 MP
Form Factor	PTZ
Usage	Outdoor
Characteristics	Two-way Audio, Microphone, Speaker, microSD

Lens

Lens Type	Motorized
Focal Length	2.7–13.5 mm
Optical Zoom	5 ×
PTZ Presets	1024
Pan / Tilt Range	Pan: 0° ~ 345°; tilt: -10° ~ 100°
Aperture	F1.2
Field of View	106.9°–30.6°

Image & Video

Supplement light	Infrared (IR), Warm light
Min. Illumination	0.005 Lux
IR Range	50 m (164 ft)
Day / Night	Day/Night (auto IR-cut)
WDR	120 dB
Frame Rate	30 fps
Compression	Ultra 265, H.265, H.264, MJPEG

Audio

Audio	Built-in mic & speaker
-------	------------------------

Network

Network Interface	1 × RJ45 10 M/100 M Base-TX Ethernet
Storage	MicroSD up to 512 GB

Power & Protection

Power Supply	DC 12 V (±25%), PoE (IEEE 802.3at)
IP / IK Rating	IP66
Power Consumption	19.3 W
Surge Protection	2 kV

Outputs & Audio

Audio Input	1
Audio Output	1

Smart & Features

Features	LightHunter, Human Detection, Line Crossing, Intrusion Detection, ONVIF
Alarm Input	1
Alarm Output	1

Connectivity

Compatible software	Uniview EZView / EZStation
---------------------	----------------------------

Compliance

Certifications	CE, UL
----------------	--------

Physical

Operating humidity	≤ 95 %
Operating Temperature	-30 ... +60 °C (-22 ... 140 °F)
Dimensions	133 × 286 × 185 mm (5.24 × 11.26 × 7.28 in)
Weight	1.32 kg (2.91 lb)