


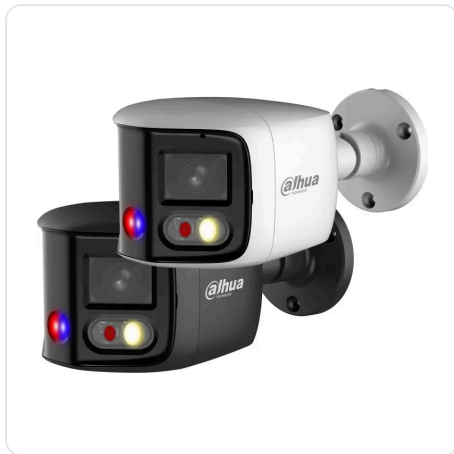

Video Surveillance / IP Cameras

IPC-PFW3849S-A180-AS-PV ქსელური კამერა 2x4MP TiOC Duo Splicing 180°

Brand Dahua
Model IPC-PFW3849S-A180-AS-PV
Warranty 12 months

Price as of 24.10.2026

945.32 ₾

VAT included


Current price and stock: online
<https://alldigital.ge/en/ipc-pfw3849s-a180-as-pv-kseluri-kamera-2x4mp-tioc-duo-splicing-180-581>

Key specs

Megapixels

4 MP

IR Range

25 m (82 ft)

Form Factor

Bullet

WDR

120 dB

Focal Length

2.8 mm

IP / IK Rating

IP67

Camera

Image Sensor	Dual 1/2.7" CMOS
Max Resolution	4096 (H) × 1860 (V)
Megapixels	4 MP
Form Factor	Bullet
Housing Material	Metal
Characteristics	Microphone, microSD

Lens

Lens Type	Fixed
Focal Length	2.8 mm
Aperture	F1.4
Field of View	H 180° / V 86°
Lens Mount	M12

Image & Video

Supplement light	Infrared (IR), Warm light
Min. Illumination	0.005 lux@F1.4 (Color); 0.0005 lux@F1.4 (B/W); 0 lux (Illuminator on)
IR Range	25 m (82 ft)
Day / Night	Day/Night (auto IR-cut)
WDR	120 dB

Image & Video	
Frame Rate	20 fps
Compression	H.265; H.264; H.264H
Audio	
Audio	G.711a; G.711Mu; PCM; G.726; G.723
Network	
Network Interface	RJ-45 (10/100 Base-T)
Storage	FTP; SFTP; Micro SD card (support max. 512 GB); NAS
Power & Protection	
Power Supply	12 VDC (±30%); PoE (802.3af)
IP / IK Rating	IP67
Power Consumption	10.3 W
Outputs & Audio	
Audio Input	1 channel (RCA port)
Audio Output	1 channel (RCA port)
Smart & Features	
Features	Line Crossing, Intrusion Detection
Alarm Input	1 input; wet contact, 5 mA 3 V–5 VDC
Alarm Output	1 output; wet contact, 300 mA 12 VDC
Connectivity	
Compatible software	DMSS, SmartPSS Lite
Compliance	
Certifications	CE
Physical	
Operating humidity	≤ 95 %
Operating Temperature	-40 ... +60 °C (-40 ... 140 °F)
Dimensions	99 × 78 × 183.1 mm (3.9 × 3.07 × 7.21 in)
Weight	695 g (24.52 oz)